



TECHLITE 600 SERIES MASS LOADED VINYL JACKET


600 Series jacket is composed of a mass loaded PVC compound with ultraviolet and flame retardant additives. This is an excellent sound blocking jacket for a low frequency noise. The smooth black PVC exterior also provides good chemical resistance.

Jacket Materials and Properties

Test Method

Standard

Total Weight:	ASTM D412	1.0 lb. / Ft ²
Tensile Strength:	ASTM D412	600psi
Die "C" Tear	ASTM D412	100 lb.
Shore A Durometer:	ASTM D2240	85 +/-5
Elongation:	ASTM D412	90%
Burn Tests:	Meets MVSS302 UL94 - HF- 1	Self Extinguishing Pass
Service Temperature:	-	-20°F - 180°F
Sound Transmission Class (STC):	ASTM E 90 (90A)	26

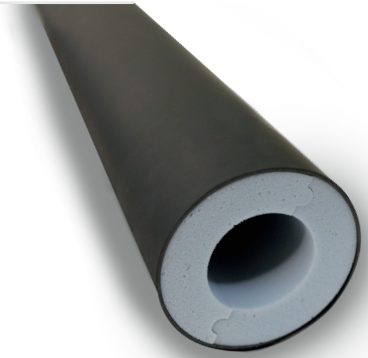

Sound Transmission Class (db Frequency Hz)						STC
125	250	500	1000	2000	4000	
17	18	22	27	32	36	26

Specifications subject to change without notice. All statements and technical information contained herein are based on tests we believe to be reliable, but the accuracy or completeness is not guaranteed under all circumstances. All flammability ratings and specifications are based on laboratory tests and do not describe the performance of these materials in an actual fire situation. Before using Accessible Products Company products, the user shall determine suitability for the intended use and user assumes all responsibility for improper selection.

