




RE: TechLite® Foam Acoustical Properties

Sound Absorption Testing to ASTM Standard C-348-85 indicates a better than 90% absorption coefficient at a frequency of 2000 Hz when using 2" thick TechLite® foam. Combined with a Class A fire rating, excellent thermal insulating value, its light weight and low toxicity, TechLite® is an excellent choice for your application.

TechLite® Sound Absorption

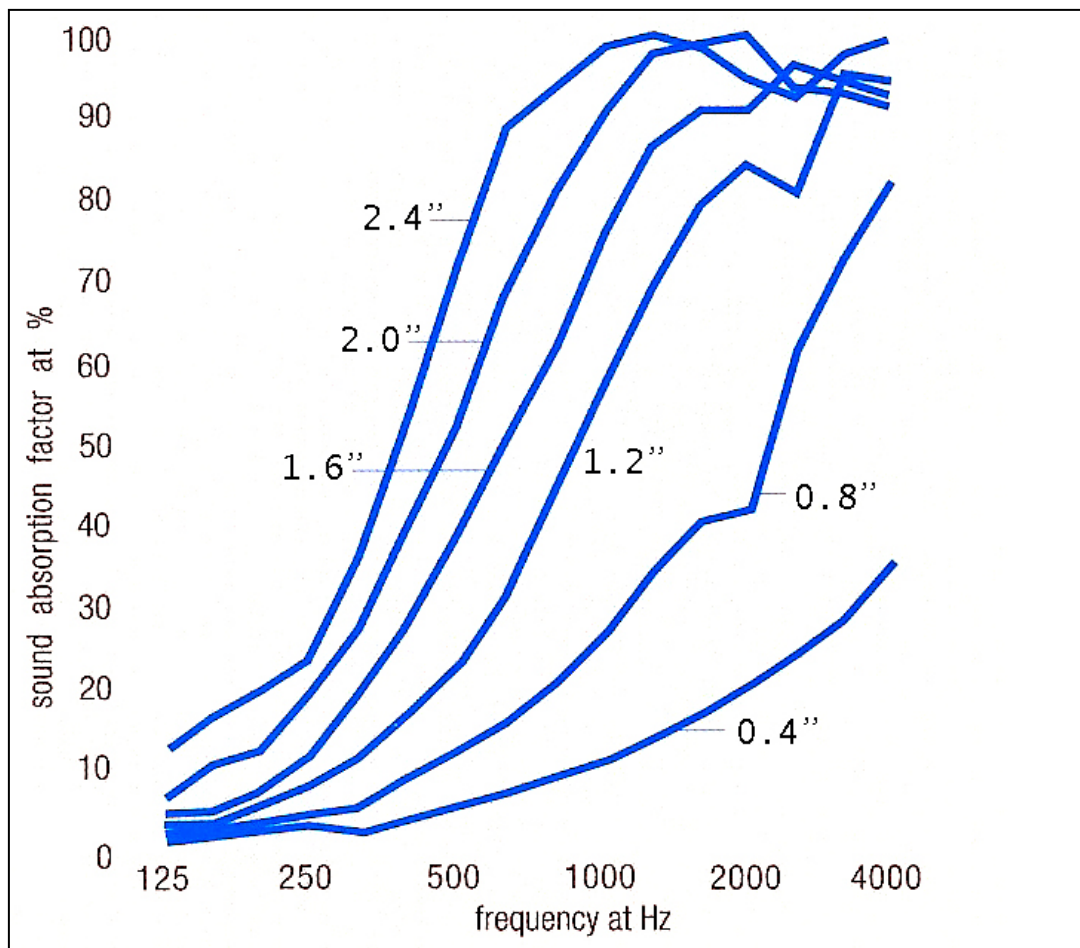

Accessible Products Company
2122 W. 5th Place
Tempe AZ 85281

480-967-8888 480-894-6255 F www.techlite.net